

## AT-300 LINEAR GUIDE



### Simple guide now with display!

AT-300 provides two options of control interface, one with traditional keypad and another with linear keypad. With linear keypad, it minimizes user error during the tour and helps user enjoy the tour more than the time they spend on figuring out the device on hand. The product is between AT-100 and AT-200, less complication and easier to view current status of the device.

Featuring 1.3 inch OLED display, IR emitter and built-in loop, AT-300 provides IR trigger function with anti-theft system. Data transfer supports USB 3.0 function, speeds up your transmitting speed when making the master device. The storage capacity is 8 GB which allows you to store up to 6000 minutes of recording contents. Built-in Li-Polymer batteries allow users to use 12 hours continuously which will be more than enough for opening hours in most occasions. What's more, AT-300 has Lip-accurate synchronization with any audiovisual application for better enjoyment of the tour experience without missing any information.

AT-300 also provides option on adding RF emitter module to provide 30 meter trigger capability. Moreover, tour guide function is also possible to be one of the options. Using 2.4 GHz, bandwidth technology, it turns AT-300 into tour guide and it creates infinite guide scenario for the tour.

Via using **okayo** Audio Master software, it makes the management of audio contents uploaded and downloaded easier and efficient. Also, with **okayo** Data Master software for data collection function, it allows administration to know how many times the devices being used, tracks being played, and etc. for smart management and analysis of data.



AT-300



AT-300PILOT

email: [office@tourguidesystem.eu](mailto:office@tourguidesystem.eu)





language



museum



exhibition

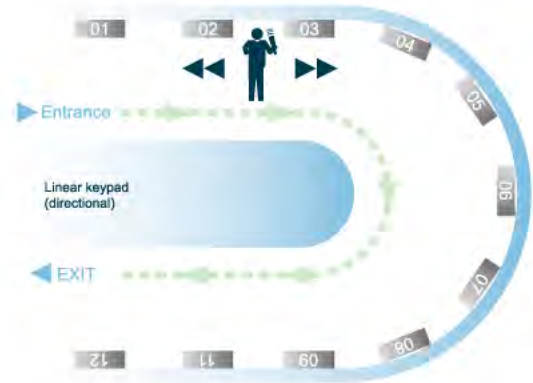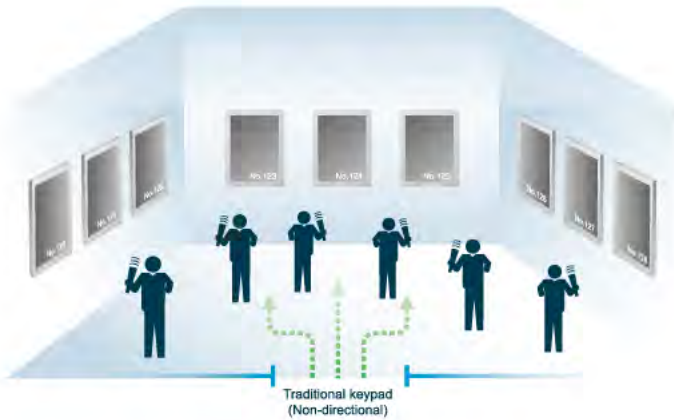

AT-300 linear guide

## AT-300

### AUDIO PARAMETERS

|                 |                                |
|-----------------|--------------------------------|
| Audio format    | High quality audio compression |
| Bandwidth       | 50 Hz ~ 18 kHz                 |
| Dynamic range   | 95 dB                          |
| Distortion      | < 0.1 %                        |
| Speaker         | Built-in 0.5 W @ 8 Ω           |
| Earphone output | 3.5 mm Jack x 2 (stereo)       |

### GENERAL PARAMETERS

|                       |                                    |
|-----------------------|------------------------------------|
| OLED display          | 1.3 inch (Blue Color 128 x 64)     |
| Memory capacity       | 8 GB                               |
| Automatic triggering  | IR, RFID and RF / TGS              |
| Alarm                 | Anti-theft system                  |
| Number of languages   | Max. 32                            |
| Number of messages    | Max. 9900 x 32                     |
| Operating temperature | -10 °C ~ 50 °C                     |
| Battery               | 3.7 V, 1200 mAh Li-Polymer battery |
| Battery life          | 14 hours                           |
| Power consumption     | 85 mA                              |
| Dimension (D x W x H) | 29.6 x 55.3 x 200 mm               |
| Weight                | 165 g (with battery)               |

### UPLOADING SUPPORT

|                    |   |
|--------------------|---|
| Software           | OKAYO Audio Master<br>OKAYO Data Master   |
| OS Support         | Windows 2000 / ME / XP / 7  |
| Download interface | USB 1.1 / USB 2.0   |
| Download speed     | 2.5 Mbytes / sec @ ATC-210U Uploader<br>20 pcs @ 5 Mbyte / sec @ ATC-221U, Uploader |

### TOUR GUIDE MODE

|                 |                    |
|-----------------|--------------------|
| Channel         | 100                |
| Frequency       | 2.4 GHz            |
| Operating Range | 30 M line of sight |